

ARTICLE NO. / DESCRIPTION	CAPACITY	TYPE	MODEL	INSTALLATION
30032014 / INV-HPB 750	750L	PRESSURIZED	HEAT PUMP BOILER	FLOOR STANDING


version.0

constructive specifications

capacity	750L
tank material	RVS / stainless steel AISI 316L (EN 1.4404)
thermal insulation	100mm thermal insulation made from flexible polyurethane
casing	"Skay" (PVC) outer casing with zip clothing
temperature gauge	0 - 120°C
coils material and connections	RVS / stainless steel AISI 316L
coil surface area	6,00m ²
coil kW rating output 85/60°C	118kW
max. operating pressure	8bar (0,8MPa)
test pressure	12bar (1,2MPa)
maximum working temperature	90°C
heating element (optional)	immersion connection 1½"
weight (empty / full)	250kg / 974kg
heat losses	120W (EN 12897)
ErP class	C
internal code	68.750.HPI.01

connections and dimensions

connections

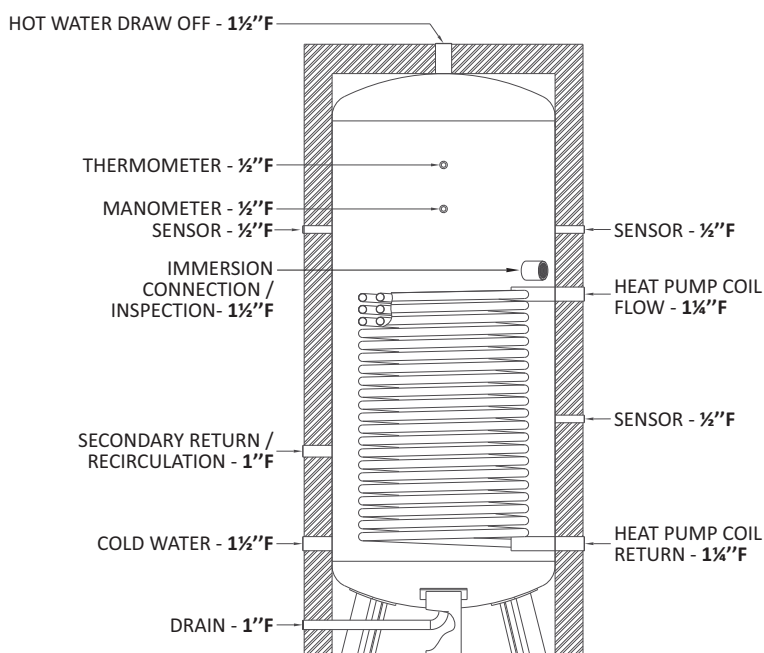

dimensions

