

ARTICLE NO. / DESCRIPTION	CAPACITY	TYPE	MODEL	INSTALLATION
30034005 / INV-HPB 300 & SL 100	400L	PRESSURIZED	COMBINATION TANK	FLOOR STANDING


version.0

constructive specifications

DHW storage capacity	300L
DHW actual capacity	275L
buffer storage capacity	100L
buffer actual capacity	105L
tank material (DHW + buffer)	RVS / stainless steel AISI 444 (EN 1.4521)
thermal insulation	PUR / polyurethane foam 50mm thickness, CFC-Free and HCFC-Free
casing	painted galvanized carbon steel DX51D
coil material and connections	RVS / stainless steel AISI 316L
coil surface area	3,00m ²
coil kW rating output 85/65°C	90kW
max. operating pressure (DHW / buffer)	8bar (0,8MPa)
test pressure (DHW / buffer)	12bar (1,2MPa)
heating element (optional)	1,5KWx230V 14" 1½" with lenght 1500mm + without plug - not fitted
	Inventum Art. Code: 30034901 / Supplier Art. Code: RIE14-TI1.5KW-CT
maximum working temperature	90°C
weight (empty / full)	129kg / 515kg
heat losses	106W (EN 12897)
ErP class	C
internal code	68.400.TT.02.V01
others	Supplied with extra feet

connections and dimensions

connections

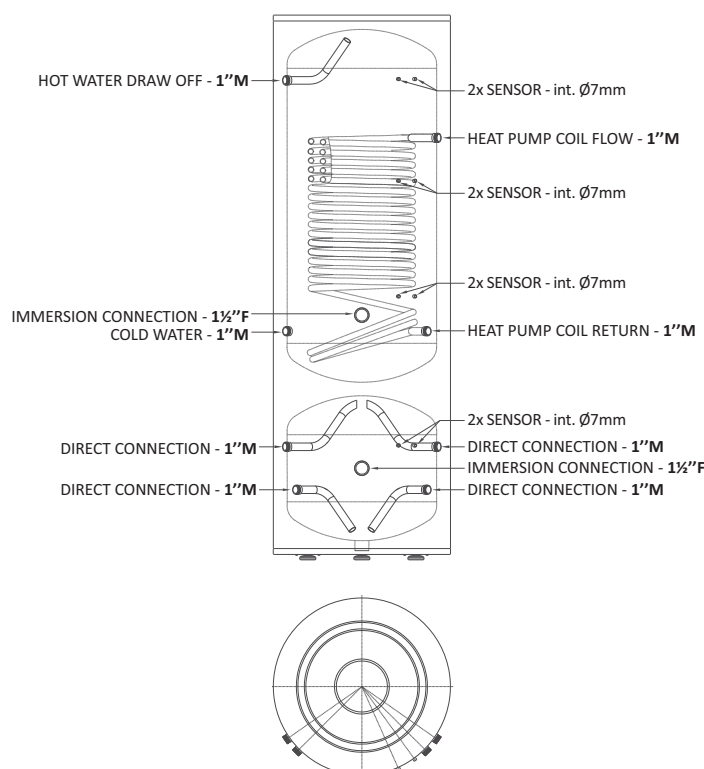

dimensions

