




PRE-SLIT WEATHERPROOF INSULATION

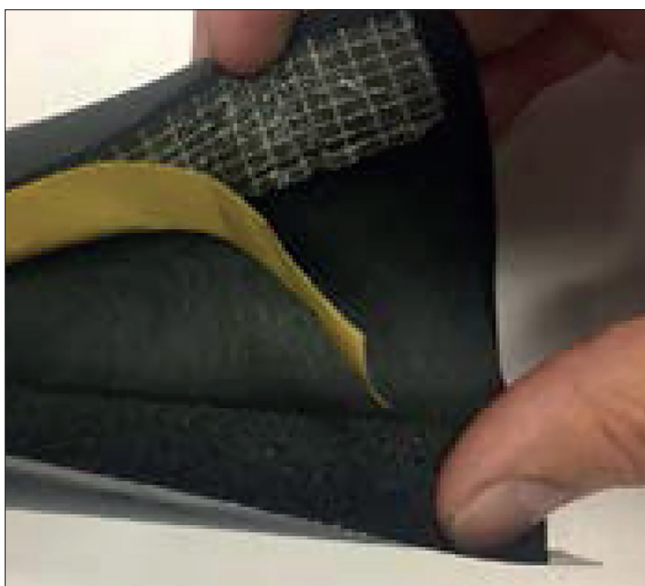

Our new pre-slit PVC coated insulation provides outstanding protection against freezing, for external boiler condensate pipework. This new design offers a quick and secure 'tape free' installation, with its peel and seal join and its self-adhesive wrap over flap. Fully compliant with the Boiler Installation Standards BS6798:2014, the tough PVC coating is both weatherproof and UV stable.

This insulation is also ideal for use on air source heat pumps or biomass flow and return pipework, to avoid heat loss and meet MIS3005 requirements. To prevent cold bridging use it in conjunction with our Through Wall Sleeve Kit, TW-KIT, to ensure the pipework is fully insulated all the way into the property.



Visit our **YouTube** site for a full installation demonstration:
<https://youtu.be/gACY2nvMJ0g>

TEMPERATURE RANGE
EXTENSIVE RANGE
(-50°C TO +110°C)
ALLOWING BRIEF
PEAKS ABOVE LIMITS.

ANTIMICROBIAL PROTECTION
AN ADVANCED
COMPOSITION
PREVENTING THE
DEVELOPMENT
OF BACTERIA AND
FUNGI (ASTM E
2180 AND ASTM G21
CERTIFICATION).

PERMEABILITY
VERY HIGH
RESISTANCE TO
WATER VAPOUR
TRANSMISSION,
ENSURING LONG -
TERM PERFORMANCE
AND EFFECTIVENESS
OF THE INSULATION
 $\mu \geq 7000$

THERMAL CONDUCTIVITY
SUPERIOR QUALITY
CLOSED-CELL
ELASTOMERIC
MATERIAL, DESIGNED
TO REDUCE THERMAL
LOSSES $\lambda = 0.036\text{W/MK}$
AT +30°C.

DENSITY
PRODUCED WITH
OPTIMUM DENSITY
FOR EFFECTIVE
REDUCTION OF
THERMAL LOSSES 60
KGR/M³, ± 10 KGR/M³.

FLEXIBILITY
EXCEPTIONAL
ELASTICITY AND
ENDURANCE FOR
TIME-SAVING
APPLICATIONS
AND EFFECTIVE
INSULATION.

FEATURES

- Avoids heat loss and improves efficiency of the installed air source heat pump
- 19mm wall insulation with a tough PVC coating • Suitable for 28mm / 32mm / 22mm pipework

THE PACKAGE

- 1 x straight 2000mm length of pre-slit 35mm, 28mm or 22mm ID insulation



STEP ONE
Open the pre-slit insulation.



STEP TWO
Wrap around the pipe, peel away yellow cover and seal together. Use the adhesive flap to secure.



STEP THREE
Condensate pipework is now fully protected with NEW pre-slit weatherproof insulation

No.	Description
FH-I-1000-22-SLIT	Insulation 1m x 22mm ID x 19mm wall PVC coated Slit & Seal
FH-I-1000-28-SLIT	Insulation 1m x 28mm ID x 19mm wall PVC coated Slit & Seal
FH-I-1000-35-SLIT	Insulation 1m x 35mm ID x 19mm wall PVC coated Slit & Seal

INSULATION PRE-SLIT WEATHERPROOF INSULATION

The DiversiTech International sales team are available to answer your questions or queries on this product. Our experts are waiting for your call +44 (0)115 900 5858 or if you prefer send an email to sales@diversitech.com or visit www.diversitech.global

DIVERSiTECH
INTERNATIONAL

Glaisdale Drive East
Nottingham NG8 4LY
United Kingdom

NOT ALL INSULATION IS THE SAME!



GREY/SILVER
INSULATION FOR
INTERNAL USE ONLY



PAINTED GREY
INSULATION SHORT
FIELD LIFE AND
REQUIRES RECOATING
EVERY FEW YEARS




BLACK CLASS 0
WEATHER-PROOF BUT
NOT UV STABLE




BLACK PVC COATED
CLASS 0 WEATHER-
PROOF AND UV STABLE

ARE YOU GETTING 100% OF THE ASHP HEAT INTO YOUR PROPERTY

INSULATE PIPEWORK

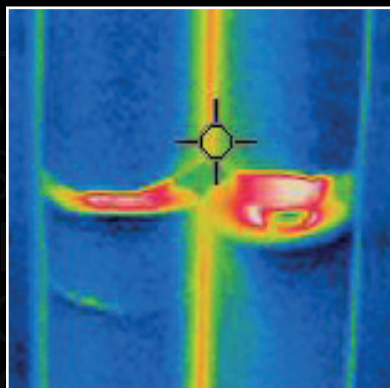

INSULATE
CONNECTIONS

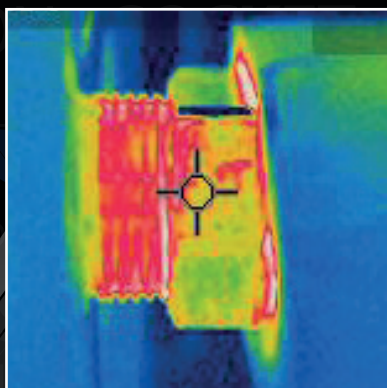

INSULATE THROUGH
THE WALL

